

# Hazardous LED Flood Light

## Product Description

LEDSION Hazardous Flood Light use best die-casting aluminum housing, anti-corrosion painting IP65 design. High-performance illumination that lasts 50,000HRS. 10KV surge protection. Replace 300-1000W MH/HPS.



## Advantage

- 1.High Efficacy low decay 700MA LED chip
- 2.High heat transmit die cast housing ADC12 aluminum, patent design, IP68
- 3.Shock and vibration resistant tempered glass, super clear 95% light transmit rate
- 4.Anti-glare.Scientific optical reflector design, making the light more focus,even, comfortable for eyes
- 5.Original Bridgelux LED source,high luminous efficacy and long lifespan
- 6.MEANWELL HLG series driver, the highest level of MEANWELL driver
- 7.Surface treatment-Powder painted, salt resistant and chemical resistant, also hard for dust to accumulate on the surface
- 8.2.0mm aluminum PCB with heat index 2.5, keep LED working under cool temperature
- 9.Working temperature: -30°C to 50°C.
- 10.IK09 robust design
- 11.UL certified housing, suitable for marine



## Applications

1. Suitable for gas station, petroleum and chemical industries, coal mine, military, airport, warehouse, marine etc.
2. Zone1 & Zone2 gaseous environment, and Zone21 & Zone22 dust environment.
3. Class I Division 2 Group A, B, C, D



Chemical Factory



Offshore Oil Mining



Military Ship



Army Base



Gas Station



Petrol Process Factory



Traning Camp



Navy Port




# Hazardous LED Flood Light


## Specifications

<b>Model No.</b>	LSCES-J40W	LSCES-J60W	LSCES-J80W	LSCES-J100W	LSCES-J120W	LSCES-J150W	LSCES-J200W
<b>Input Power</b>	40W	60W	80W	100W	120W	150W	200W
<b>Lumen</b>	5200 LM	7800 LM	10400 LM	13000 LM	15600 LM	19500 LM	26000 LM
<b>Lumen Efficacy</b>	130 LM/W						
<b>Color Temperature</b>	3000K, 4000K, 5000K, 5700K, 6500K						
<b>CRI</b>	>70						
<b>Viewing Angle</b>	120° x 120° Degree						
<b>Input Voltage</b>	100-277VAC 50/60Hz						
<b>PF</b>	≥0.98						
<b>THD</b>	≤10%						
<b>Driver Brand</b>	Meanwell						
<b>Driver Model</b>	HLG-40-42A	HLG-60-42A	HLG-80-42A	HLG-100-42A	HLG-120-42A	HLG-150-42A	HLG-185-42A
<b>Optional Accessory</b>	Photocell / Surge protector/ Motion sensor						
<b>LED Brand</b>	Bridgelux						
<b>LED Type</b>	3030						
<b>LED QTY</b>	36 PCS	108 PCS	108 PCS	108 PCS	192 PCS	192 PCS	192 PCS
<b>Housing</b>	Aluminum Alloy						
<b>Housing Color</b>	Gray/Green/Yellow/Customized						
<b>Waterproof Rating</b>	IP68						
<b>Operating Temperature</b>	-40°C TO 50°C						
<b>Operating Humidity</b>	20%-90% RH						
<b>Storage Temperature</b>	-40°C TO 80°C						
<b>Storage Humidity</b>	10%-95% RH						
<b>Warranty Time</b>	5 Years						


## Photometrics

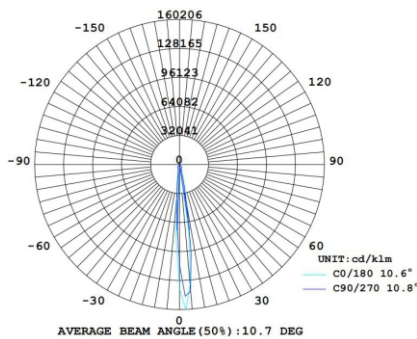

40W

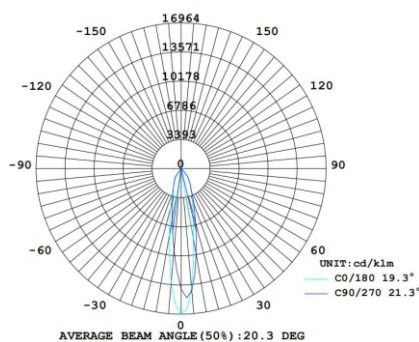

60W,80W,100W

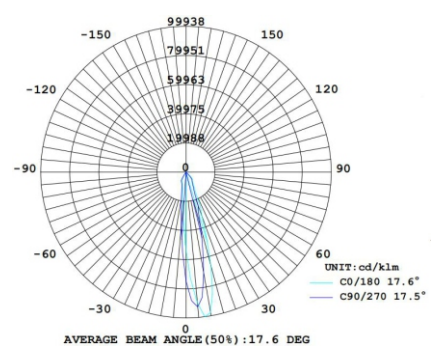

120W,150W,200W


# Hazardous LED Flood Light

## Projected LED Lumen Maintenance


Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the Hazardous Flood light platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

## Dimensions

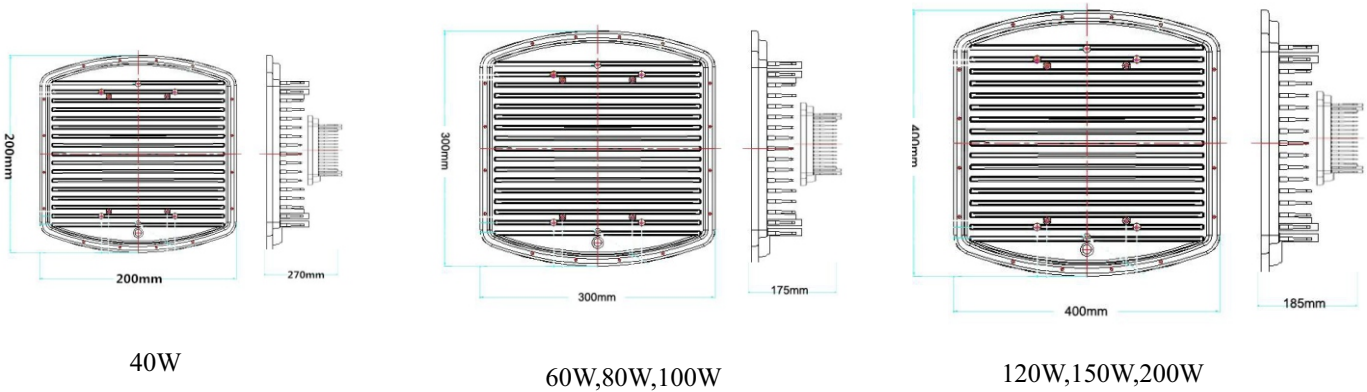

## Installation

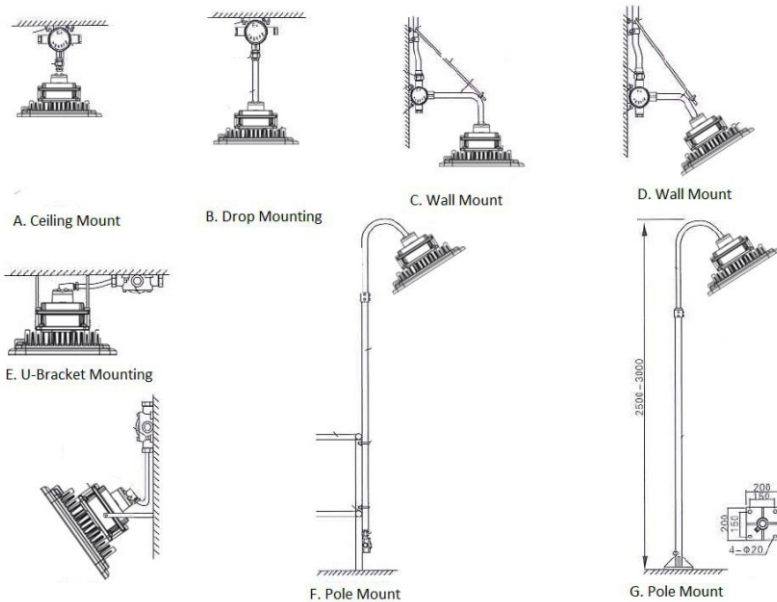

- Fixture is equip with Bracket
- Connection outlet conduit: 3/4" NPT
- Conduit and pole are not included in products.
- All installation must conduct by qualify electrician.
- Seal must be placed in each conduit

# Hazardous LED Flood Light

## Mounting Kits Options

1. U shaped bracket



2. Adjustable Wall/Ceiling Mount Plate



3. High bay mount hook



4. Recessed mount holder



## Packing Information

Item No.	Outside Carton	QTY/CTN	N.W.	G.W.
LSCES-J120,150,200	460x460x240mm	1	11.5kgs	12.5kgs
LSCES-J60,80,100	370x370x240mm	1	7.5kgs	8.5kgs
LSCES-J40S	360*250x200mm	1	4kgs	4.5kgs

# Hazardous LED Flood Light

---

## Notice for User

Please turn off power before install or change assembly parts.

The input voltage and lamps should be matched, after connecting the power line,

Please make sure the wiring section is insulated.

No-professionals, must not install and disassemble the lamps.

## After-sale Service

The product refers to electricians knowledge. Please don't disassemble it by yourself.

If any quality problem happens, please contact the factory for warranty details.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are without notice.