

LED Garden Light Specification







I . Application :

Pedestrian street, factory, schools, garden, courtyard, hotel, parking lot, public park etc.

II . Features:

- 1. Lighter in weight. High cost performance.
- 2. Different precision refractive optical lens designed for various applications. Using high brightness Samsung led chips and high quality Mean Well driver .
- 3. IP65 suitable for wet locations.
- 4. Environment friendly. Contains no lead or mercury.
- 5. Warranty: 5 years.
- 6. DIALUX simulation design available.

III. Product Size:

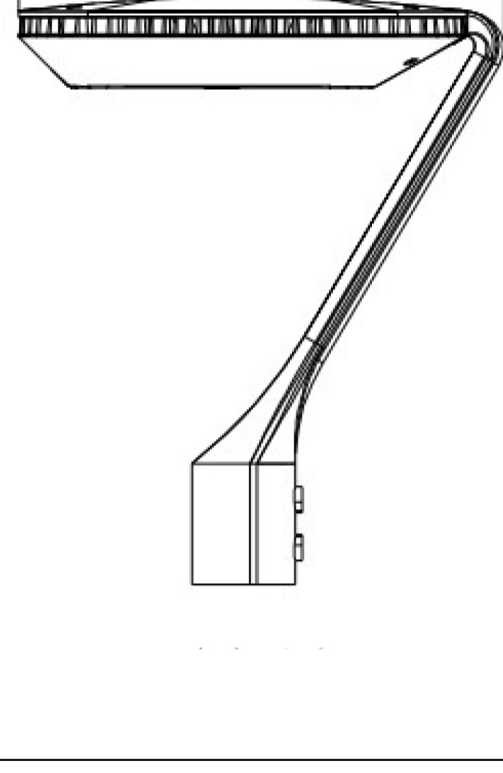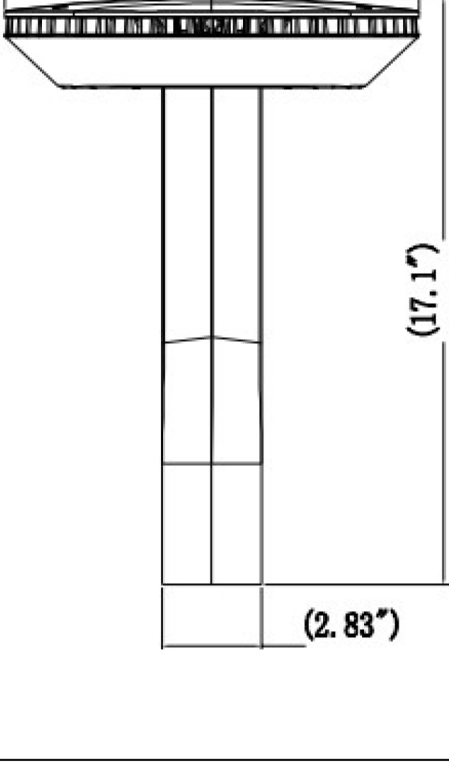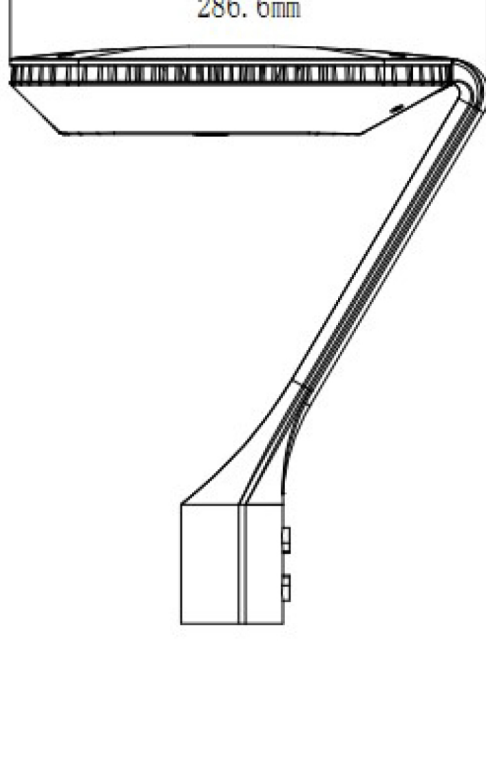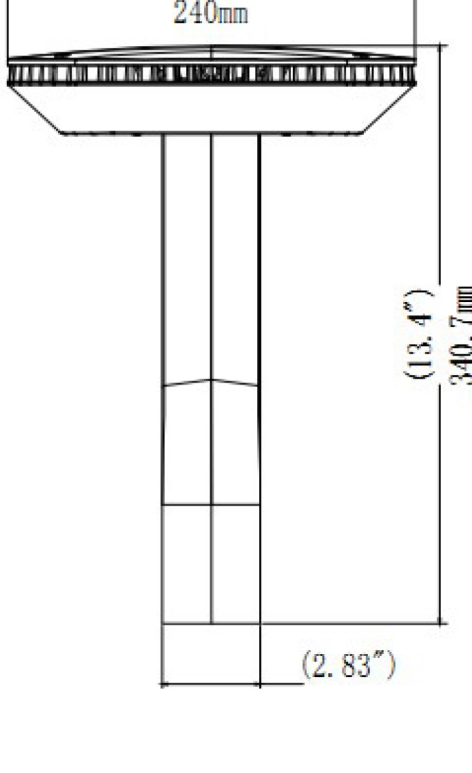


IV. Technical Parameter:


| Model | CCT | CRI | Lumens | Size (MM) | System Power |
|---|-------------|-----|---------|-------------------|--------------|
| YB-TP260-W020 | 3000K-7000K | ≥70 | 2600LM | 286.6*240*340.7 | 20±2W |
| YB-TP260-W035 | 3000K-7000K | ≥70 | 4550LM | 286.6*240*340.7 | 35±3W |
| YB-TP325-W50 | 3000K-7000K | ≥70 | 6500LM | 351.8*299.1*436.5 | 60±5W |
| YB-PT325-W100 | 3000K-7000K | ≥70 | 13000LM | 351.8*299.1*436.5 | 100±5W |
| Input Voltage: 100-277Vac or 180-528vac | | | | | |
| LED CHIP:Philips Lumileds 3030 | | | | | |
| LED driver:Sosen / MEANWELL | | | | | |
| Working temperature: - 30~ + 50°C | | | | | |

V . Beam Angle:


Type IV 100*140Deg

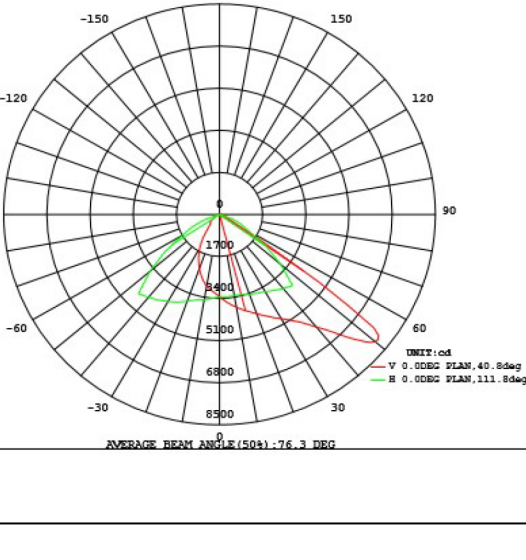

Type V 120Deg

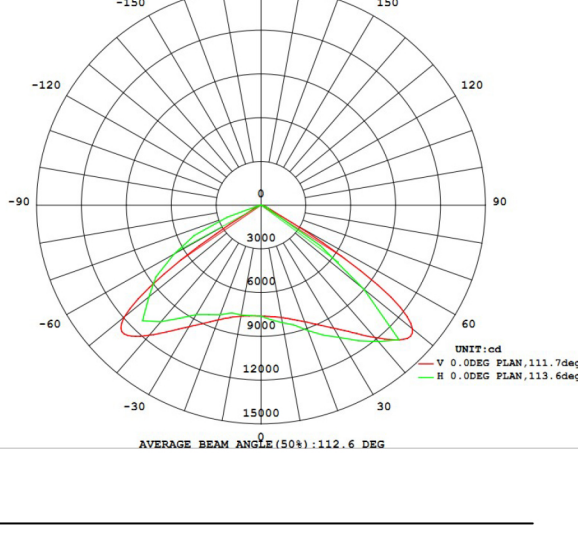


VI. Installation Instruction

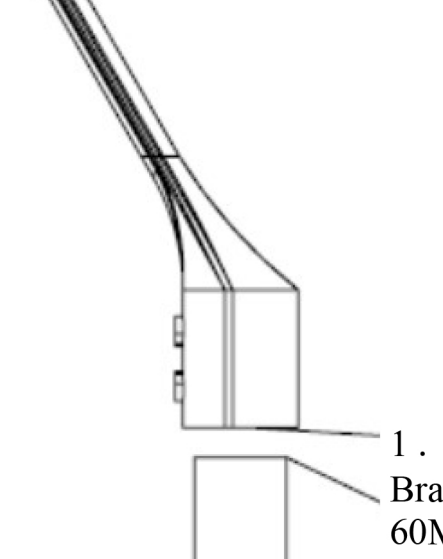

1 . The Pole's and the Bracket Diameter is 60MM

2 Tighten the M8 screws.

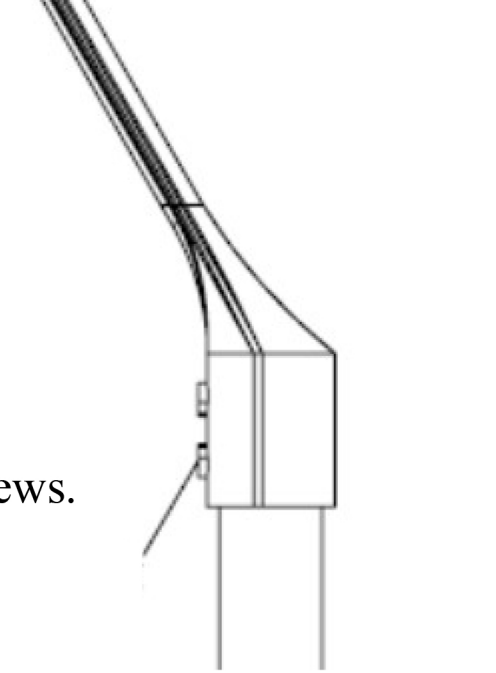

Brown for L
Blue for N
Yellow&Green for G

Dimmable cable
Blue is “+”
White is “-”

VII. Package Information:

| Item | G.W | N.W | Carton Size (MM) |
|---------------|-----|-----|------------------|
| YB-TP260-W020 | 5.0 | 4.2 | 320*285*415mm |
| YB-TP260-W035 | 5.2 | 4.4 | 320*285*415mm |
| YB-TP325-W50 | 8 | 6.8 | 485*350*400mm |
| YB-TP325-W100 | 8.2 | 7 | 485*350*400mm |

VIII. Installation Caution:

- 1、Make sure the power has been turned off before maintenance.
- 2、Clean the lens cover regularly to maintain high transmission of light.
- 3、Clean up the dust from the reflector and heat sink regularly to keep sound heat dispersion.
- 4、Be careful not to use water or corrosive solution for cleaning, preferably with a dry cloth.
- 5、When install or replace power supply, directly open the back cover with a screwdriver, then remove the power supply. There are three-core cable of AC power, red corresponds to the power of “L”, blue to “N”, and green or yellow to “G” .