
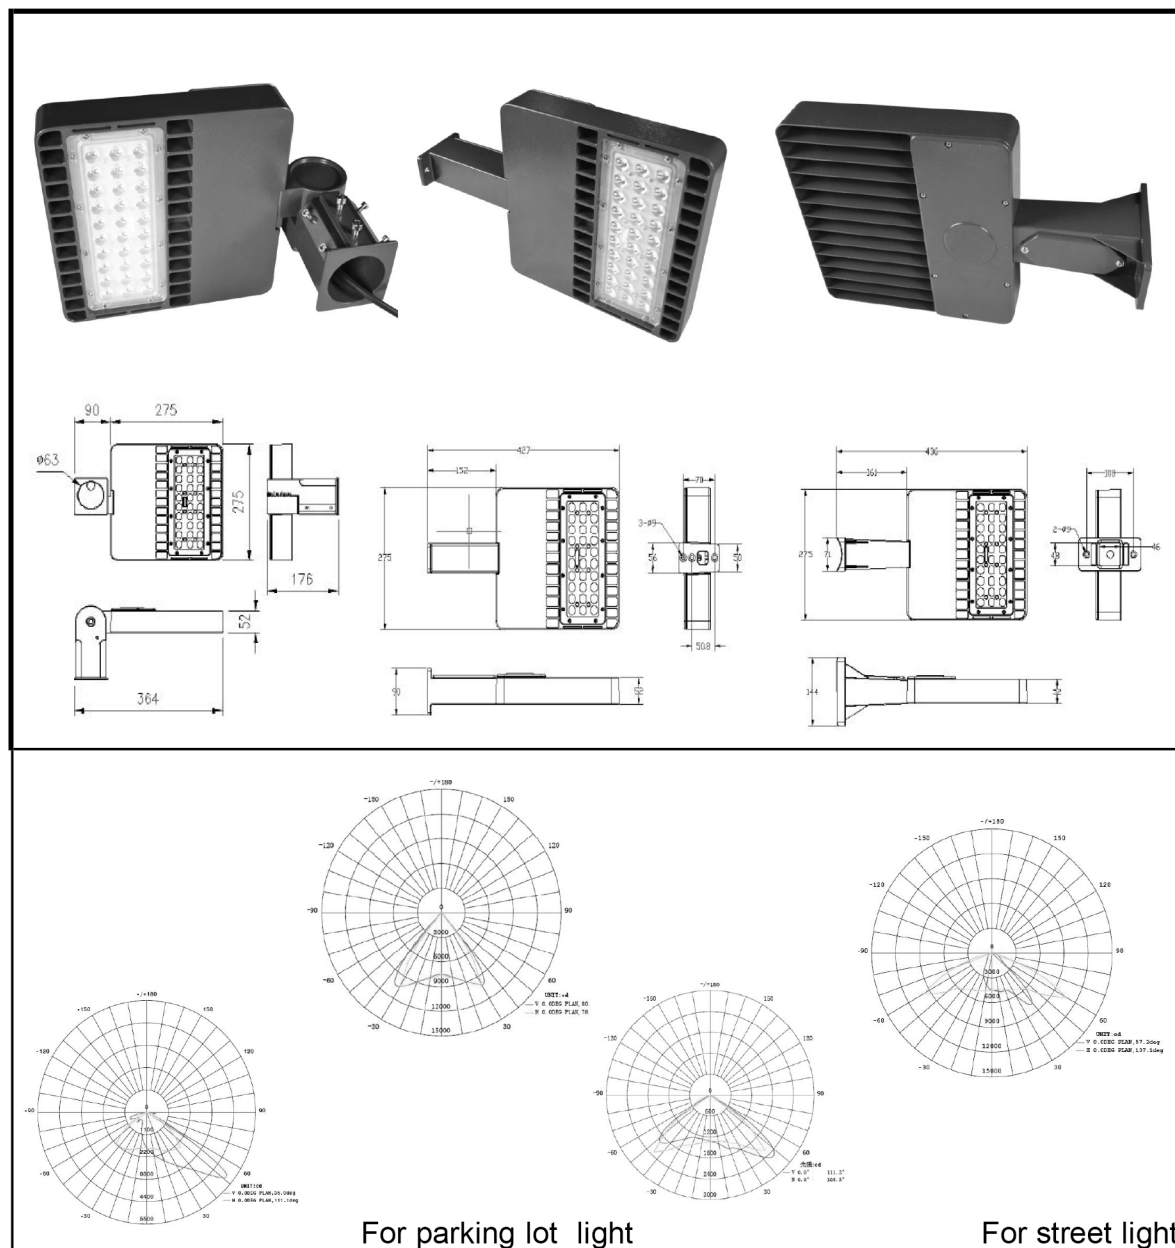


description		
1	Model:	A0-YBPL27548W
2	Certification:	ETL & DLC approval
3	Input voltage:	AC100-277V
4	Input frequency:	50/60HZ
5	Consumed power:	48W ±4W
6	Power factor:	>0.9
7	Light source:	Philips Lumiled 3030
8	Luminous flux:	6000±6% lm
9	Light efficacy:	125±6%lm/W
10	Color tempreture:	3000-7000K
11	Color rendering index:	Ra:70-80
12	LED angle:	Type II,Type III,Type IV,Type V


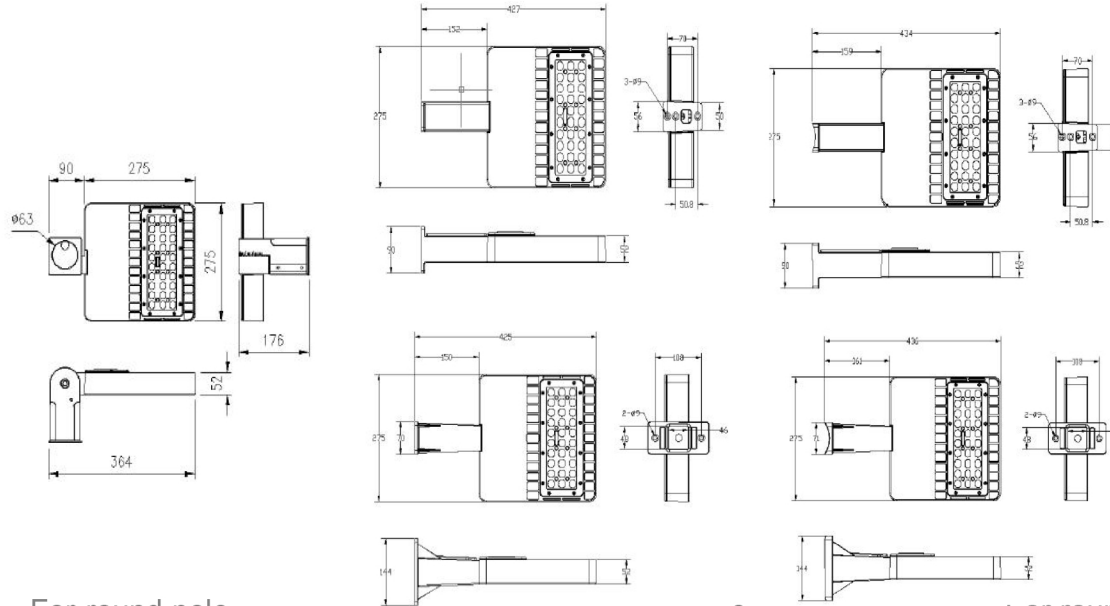


13	Installation bracket:	A/B/C/D/E/F bracket for choice
14	Shape:	Square
15	Material:	aluminium alloy
16	Cover color:	Black /Bronze/ White
17	Dimension:	364x275×52mm
18	Net weight:	4.0kg/PC
19	Working temperture:	minus 45 to plus 45
20	Lifespan:	>50000hours

 For round pole For square pole For round pole		
Packing		FOB price (USD)
1	piece in one inner box	
size:	35*14*53cm/ctn	
	GW/NW:4.6kg/4.0kgKG	
	1 box/ctn	
Outdoor	Outdoor flood lighting,architecture decorated lighting,industrial lighting,physical training centre and outdoor stadium lighting,port,dock etc.Having light distribution system,can be used in street lighting also.	



Three Installation ways

Installation 1 (Round Pole):

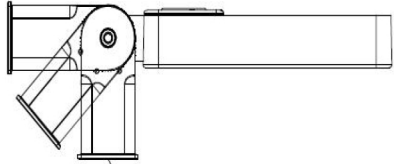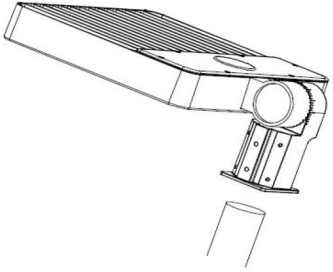

adjustalbe installation beam angle

Installation 2 (Round pole):

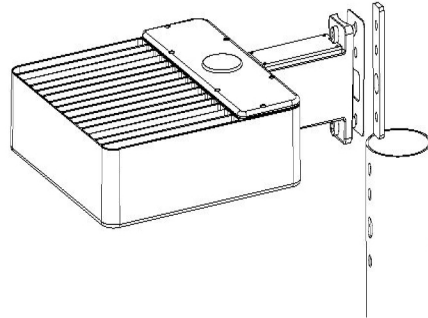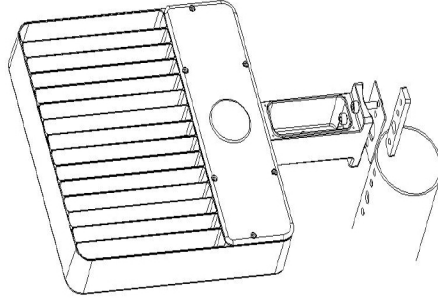

Installation 3 (Square Pole):

