

# LED Semi Cutoff Wall pack light




## 1.The application of the occasions

Factory workshop, Gym, industrial lighting, wall lighting area.

## 2. Features

- 1 Including series of patents, Unique funnel heat sinker, making the lamp better for heat dissipation. Fresnel teeth lighting design for the PC cover, which is suitable for wall light distribution.
- 2 The LED driver and LED light source are separated, which is convenient for install and assemble.
- 3 LED driver is movable easily, which helps to replace LED driver.
- 4 Beauty for the appearance, using Philips / Samsung LED.
- 5 Sosen or Meanwell Driver are applied.
- 6 IP65.


## 3 Dimension for the product

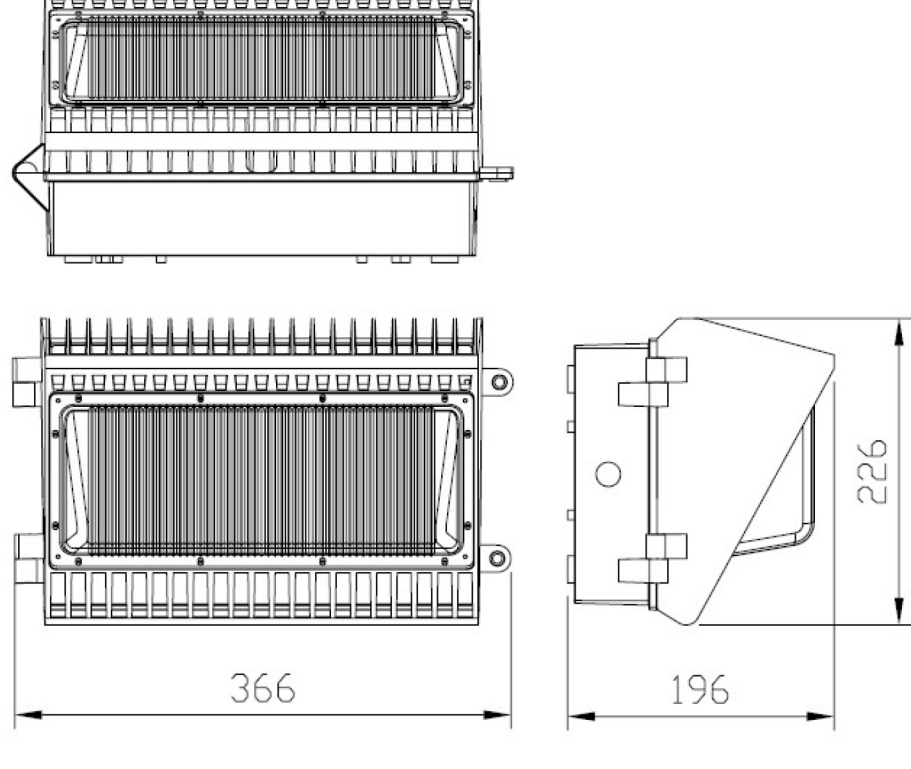

## 4 Main technical parameters

| Item NO.                       | CCT         | RA  | Lumens   | Input Voltage | Lamp power | Product size   | Packaging size | N.W    | G.W    |
|--------------------------------|-------------|-----|----------|---------------|------------|----------------|----------------|--------|--------|
| YB-WL266-W40                   | 3000K~7000K | ≥70 | >130lm/w | AC 180-528V   | 40±5W      | 366*226*196 mm | 405*285*255 mm | 5.5 KG | 6.0 KG |
| YB-WL266-W60                   | 3000K~7000K | ≥70 | >130lm/w | AC 180-528V   | 60±5W      | 366*226*196 mm | 405*285*255 mm | 5.5 KG | 6.0 KG |
| YB-WL266-W80                   | 3000K~7000K | ≥70 | >130lm/w | AC 180-528V   | 80±5W      | 366*226*196 mm | 405*285*255 mm | 5.5 KG | 6.0 KG |
| YB-WL266-W100                  | 3000K~7000K | ≥70 | >130lm/w | AC 180-528V   | 100±5W     | 366*226*196 mm | 405*285*255 mm | 8.0 KG | 8.5 KG |
| YB-WL266-W120                  | 3000K~7000K | ≥70 | >130lm/w | AC 180-528V   | 120±5W     | 366*226*196 mm | 405*285*255 mm | 8.0 KG | 8.5 KG |
| YB-WL266-W150                  | 3000K~7000K | ≥70 | >130lm/w | AC 180-528V   | 150±5W     | 366*226*196 mm | 405*285*255 mm | 8.0 KG | 8.5 KG |
| IP65                           |             |     |          |               |            |                |                |        |        |
| PF>0.9                         |             |     |          |               |            |                |                |        |        |
| 4000K 5000K 6000K CCT optional |             |     |          |               |            |                |                |        |        |
| LED driver: MEAN WELL          |             |     |          |               |            |                |                |        |        |
| Storage Temp: -40 ~ 50°C       |             |     |          |               |            |                |                |        |        |

## 5 Luminous Spot

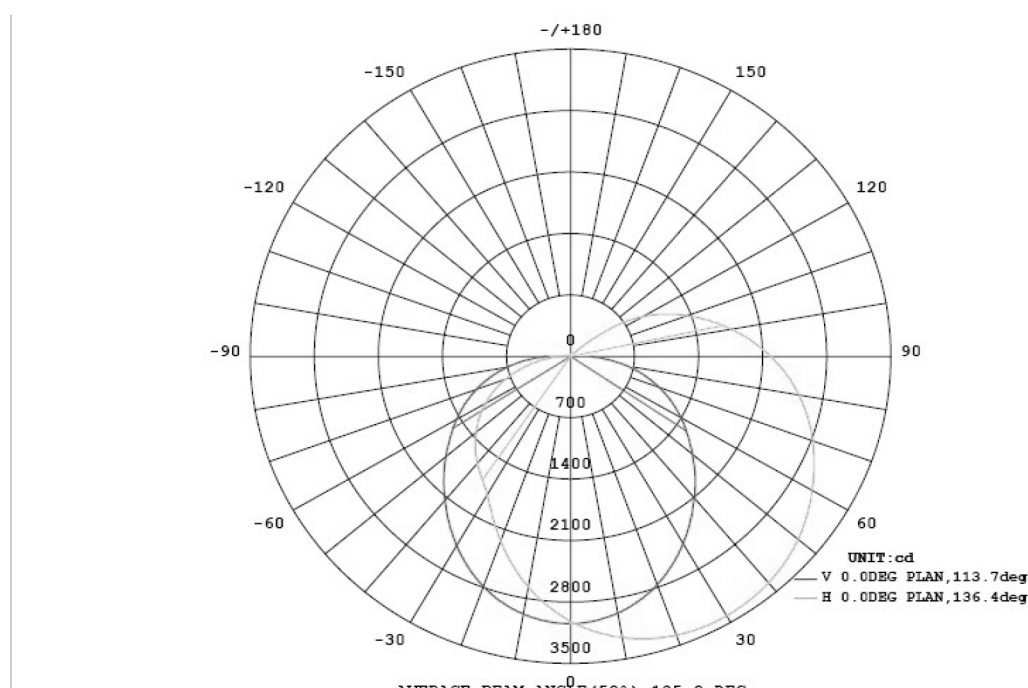


## 6 Instruction for Installation

Open the wire-connecting box,connect the input wire of the LED driver with the AC input wire,and then close the box



Using screws to install the power supply box onto the solid wall

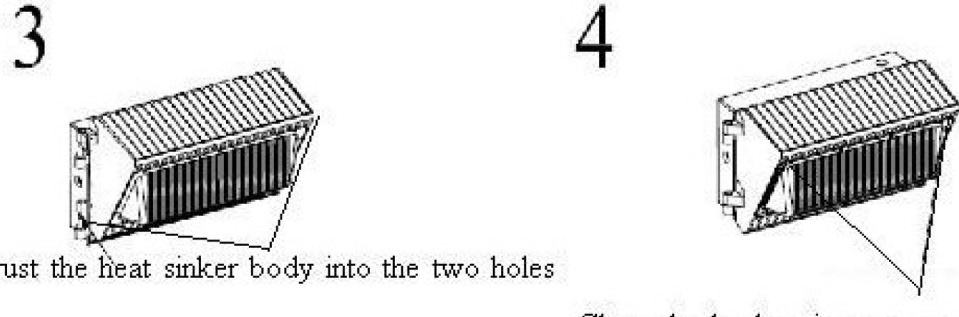

Thrust the heat sinker body into the two holes

Close the body using screws and tighten them.

## 7 Attentions for installation

- Cut off the power and make sure the wall can burden the weight of the lamp before install the lamp.
- Make sure the lamp correctly installed, in case of the lamp's dropping down.
- Do not use the lamp in the area with aggressive gas.
- Do not cover the lamp with anything which is harm for heat dissipation.
- Be careful and connect the ground line well.
- Guarantee 5 years.
- Products faults caused by separating, remodeling or incorrectly construction are not in the warranty area.