


LED High Bay





CE CB




Model NO.	BB-GKD-100W-E7	BB-GKD-150W-E7	BB-GKD-200W-E7
Wattage	100W	150W	200W
Luminous Efficiency	190LM/W(170LM/W,150LM/W)		
Total Lumen	19,000LM	28,500LM	38,000LM
Beam Angle	60° /90°/120°/Reflector for option		
Driver	Sosen		
PF	> 0.95		
Dimming	0-10V/DALI/PWM		
LED	Lumileds/Epistar 2835		
LED Qty	400pcs	540pcs	720pcs
CCT	3000K/4000K/5000K/5700K/6500K		
CRI	>70(80Ra optional)		
Input Voltage	AC100-277V 50/60Hz		
IP Rating	IP65		
IK Rating	IK09		
Life span	>50,000hours		
Carton Size (mm)	L300mm x W300mm x H160mm	L340mm x W340mm x H160mm	L380mm x W380mm x H180mm
QTY./CTN.	1 pcs/CTN	1 pcs/CTN	1 pcs/CTN
Net Weight	1.72Kg	2.14Kg	2.64Kg
Gross Weight	2.18Kg	2.72Kg	3.36Kg
Certificate	CE,CB,SAA,C-tick,ROHS		

* Other specifications shall be confirmed with the sales representative.


Features:

- Patented design
- System efficiency 190 LM/W (170 LM/W,150 LM/W for option)
- Sosen Driver, PF>0.95
- Lumileds/Epistar 2835 SMD LED , CRI > 70 (80Ra optional)
- ADC12 aluminum die casting housing , perfect heat dissipation
- Available with 60°/ 90°/120° beam angle
- 3000K / 4000K / 5000K / 5700K / 6500K CCT
- Long life span , L70 > 50,000 Hours


Distribution Curve:



60°




90°




120°


Technical Drawing :



100W

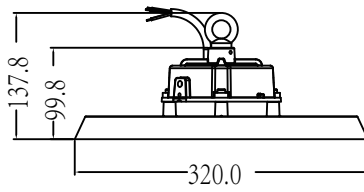

150W

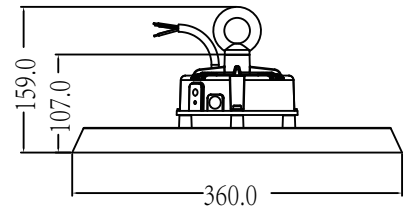

200W